

**CEN/TC 151**

Date: 2007-04

**prEN XXXXX:2007**

CEN/TF 151

Secretariat: DS

## **Soil and sludge — Determination of selected polybrominated diphenylethers (PBDE) — Gaschromatographic method with mass spectrometric detection**

*Boden und Schlamm — Bestimmung ausgewählter polybromierter Diphenylether (PBDE) — Gaschromatographisches Verfahren mit massenspektrometrischer Detektion*

ICS:

Descriptors:

Document type: European Standard  
Document subtype:  
Document stage: Working Document  
Document language: E

## Contents

	Page
1	Scope..... 6
2	Normative references..... 6
3	Terms and definitions ..... 7
4	Abbreviations ..... 7
5	Principle..... 8
6	Reagents..... 8
6.1	Solvents for extraction, cleanup and preparation of stock solutions..... 8
6.2	Reference substances ..... 8
6.3	Internal standards ..... 8
6.4	Calibration solutions for multicomponent-multilevel calibration ..... 10
7	Apparatus ..... 10
7.1	General ..... 10
7.2	Equipment for sample preparation..... 10
7.3	Extraction apparatus..... 11
7.4	Cleanup apparatus ..... 11
7.5	Concentration apparatus ..... 11
7.6	Other equipment ..... 11
8	Sampling and sample pre-treatment ..... 12
8.1	Sampling..... 12
8.2	Sample pre-treatment..... 12
9	Extraction and cleanup ..... 12
9.1	General ..... 12
9.2	Extraction ..... 12
9.3	Cleanup..... 12
9.4	Final concentration of cleaned sample extract..... 13
9.5	Blank determination..... 13
10	GC-MS analysis..... 13
10.1	General ..... 13
10.2	Gas chromatographic analysis..... 13
10.3	Mass spectrometric detection ..... 15
10.4	Minimum requirements for identification of PBDE ..... 16
11	Calibration of the GC-MS ..... 16
11.1	General ..... 16
11.2	Evaluation of the range of the linear relationship..... 17
11.3	Calibration with internal standards ..... 18
11.4	Quantification with the internal standard..... 19
11.5	Results and reporting ..... 20
12	Precision data ..... 20
13	Test report ..... 21
Annex A (informative)	Examples of operation of extraction and cleanup methods..... 22
A.1	Example 1 ..... 22
A.1.1	General ..... 22
A.1.2	Reagents..... 22
A.1.3	Procedure ..... 22
A.2	Example 2 ..... 23
A.2.1	General ..... 23
A.2.2	Reagents..... 23

<b>A.2.3</b>	<b>Procedure</b> .....	<b>23</b>
<b>A.3</b>	<b>Example 3</b> .....	<b>23</b>
<b>A.3.1</b>	<b>General</b> .....	<b>23</b>
<b>A.3.2</b>	<b>Reagents</b> .....	<b>24</b>
<b>A.3.3</b>	<b>Procedure</b> .....	<b>24</b>
<b>Annex B</b>	<b>(informative) Repeatability and reproducibility data</b> .....	<b>25</b>
<b>B.1</b>	<b>Performance characteristics</b> .....	<b>25</b>
<b>B.1.1</b>	<b>Objective of the interlaboratory comparison</b> .....	<b>25</b>
<b>B.1.2</b>	<b>Materials used in the interlaboratory comparison study</b> .....	<b>25</b>
<b>B.1.3</b>	<b>Interlaboratory comparison results</b> .....	<b>26</b>

## Foreword

This document (BT WI CSS99044:2007) has been prepared by Technical Committee CEN/BT 151 "Horizontal", the secretariat of which is held by DS.

This document is a working document.

The standard is applicable and validated for several types of matrices. The table below indicates which ones.

Material	Validated	Document
Soil	<input type="checkbox"/>	[reference]
Sludge	<input type="checkbox"/>	[reference]
Sediment	<input type="checkbox"/>	[reference]
Treated biowaste	<input type="checkbox"/>	[reference]

## Introduction

Brominated flame retardants (BFRs) are a chemically diverse class of compounds used in a variety of commercial applications, such as in plastics, textiles, electronic circuitry and other materials to prevent fires. The most used BFRs are polybrominated diphenylethers (PBDEs), hexabromocyclododecane (HBCD) and tetrabromobisphenol A (TBBPA). As the properties of PBDEs make them efficient flame retardants, their demand is increasing rapidly and, therefore, so is their production. PBDE exhibit the typical characteristics of persistent organic pollutants (POPs). PBDEs are resistant towards acids and bases as well as heat and light and also to reducing or oxidising compounds, so are, therefore, persistent in the environment. However, they are likely to be more susceptible to environmental degradation than PCBs due to the C-Br bond being weaker than the C-Cl bond. Similar to dioxins and PCBs, PBDEs are of environmental concern because of their high lipophilicity and high resistance to degradation process. They have been shown to accumulate in the food chain and can already be found in samples from all over the world.

There are a total of 209 theoretically PBDE congeners (in a similar manner to PCBs). However, commercially produced PBDE mixtures contain a limited number of congeners and are less complex than the corresponding technical PCB mixtures. PBDEs are typically produced at three different degrees of bromination, i.e., Penta-BDE, Octa-BDE and Deca-BDE. Penta-BDE formulation consists of 41 % to 42 % tetra-BDEs (mainly BDE-47) and 44 % to 45 % penta-BDEs (predominantly BDE-99 and BDE-100), whereas Deca-BDE formulation consists mainly of BDE-209 (97 % to 98 %), with a small amount of nona-BDES (0,3 % to 3 %). On the other hand, hepta-BDE-183 is often taken as indicative of the presence of the Octa-BDE formulations.

This document was developed in the project 'Horizontal'. It is the result of a desk study "Horizontal Standardization of Brominated Flame Retardants (BFRs)" in the project and aims at evaluation of the latest developments in assessing PBDE in sludge, soil, treated biowaste and neighbouring fields. After an evaluation study, in which e.g. the ruggedness of the method was studied, a European wide validation of the draft standard has taken place. The results of the desk studies as well as the evaluation and validation studies have been subject to discussions with all parties concerned in CEN. The standard is part of a modular horizontal approach in which the standard belongs to the analytical step.

Until now test methods determining properties of materials were often prepared in Technical Committees (TCs) working on specific products or specific sectors. In those test methods often steps as sampling,

extraction, release or other processing, analyses, etc were included. In this approach it was necessary to develop, edit and validate similar procedural steps over and over again for every material or product. Consequently this has resulted in duplication of work. To avoid such duplication of work for parts of a testing procedure references to parts of test methods from other TCs were introduced. However the following problems are often encountered while using references in this way: 1) The referenced parts are often not edited in a way that they could easily be referred to, 2) the referenced parts are often not validated for the other type of material and 3) the updates of such test standards on products might lead to inadequate references.

In the growing amount of product and sector oriented test methods it was recognised that many steps in test procedures are or could be used in test procedures for many products, materials and sectors. It was supposed that, by careful determination of these steps and selection of specific questions within these steps, elements of the test procedure could be described in a way that can be used for all materials and products or for all materials and products with certain specifications.

Based on this hypothesis a horizontal modular approach is being investigated and developed in the project 'Horizontal'. 'Horizontal' means that the methods can be used for a wide range of materials and products with certain properties. 'Modular' means that a test standard developed in this approach concerns a specific step in assessing a property and not the whole "chain of measurement" (from sampling to analyses). A beneficial feature of this approach is that "modules" can be replaced by better ones without jeopardizing the standard "chain".

The use of modular horizontal standards implies the drawing of test schemes as well. Before executing a test on a certain material or product to determine certain characteristics it is necessary to draw up a protocol in which the adequate modules are selected and together form the basis for the test procedure.

The modules that relates to this standard are specified in section XX Normative references.

An overview of modules and the manner, in which modules are selected will be worked out later, at which time proper reference in this standard will be provided.

## 1 Scope

This European Standard specifies a method for the determination of selected polybrominated diphenylethers (PBDE) (Table 1) in sediment and sludge using gas chromatography/mass spectrometry (GC-MS) in the electron impact (EI) or negative ion chemical ionisation (NCI) mode. The risk of misinterpretation of interfering substances is smaller with EI due to its higher specificity, but its sensitivity is ten times lower than that obtained with NCI. It is possible to analyse as well other brominated diphenylethers according to this European Standard but its applicability shall be verified in each case.

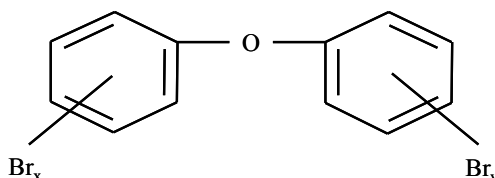


Figure 1

Table 1 — PBDE congeners determined by this European Standard

No	Congener	Formula	Abbreviation <sup>a</sup>	Molar mass g/mol
1	2,2',4,4'-Tetrabromodiphenylether	C <sub>12</sub> H <sub>6</sub> Br <sub>4</sub> O	BDE-47	485,7950
2	2,2',4,4',5-Pentabromodiphenylether	C <sub>12</sub> H <sub>5</sub> Br <sub>5</sub> O	BDE-99	564,6911
3	2,2',4,4',6-Pentabromodiphenylether	C <sub>12</sub> H <sub>5</sub> Br <sub>5</sub> O	BDE-100	564,6911
4	2,2',4,4',5,6'-Hexabromodiphenylether	C <sub>12</sub> H <sub>4</sub> Br <sub>6</sub> O	BDE-154	643,5872
5	2,2',4,4',5,5'-Hexabromodiphenylether	C <sub>12</sub> H <sub>4</sub> Br <sub>6</sub> O	BDE-153	643,5872
6	2,2',3,4,4',5,6-Heptabromodiphenylether	C <sub>12</sub> H <sub>3</sub> Br <sub>7</sub> O	BDE-183	722,4832
7	2,2',3,3',4,4',5',6-Octabromodiphenylether	C <sub>12</sub> H <sub>2</sub> Br <sub>8</sub> O	BDE-196	801,3793
8	2,2',3,3',4,4',6,6'-Octabromodiphenylether	C <sub>12</sub> H <sub>2</sub> Br <sub>8</sub> O	BDE-197	801,3793
9	2,2',3,4,4',5,5',6-Octabromodiphenylether	C <sub>12</sub> H <sub>2</sub> Br <sub>8</sub> O	BDE-203	801,3793
10	Decabromodiphenylether	C <sub>12</sub> Br <sub>10</sub> O	BDE-209	959,1714

<sup>a</sup> Numbering analog to IUPAC nomenclature for PCB

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CSS99031 *Sludge, treated biowaste, and soils in the landscape – Sampling – Framework for the preparation and application of a sampling plan*

CSS99058 *Sludge, treated biowaste, and soils in the landscape – Sampling – Part 1: Guidance on selection and application of criteria for sampling under various conditions*

CSS99057 *Sludge, treated biowaste, and soils in the landscape – Sampling – Part 2: Guidance on sampling techniques*

CSS99032 *Sludge, treated biowaste, and soils in the landscape – Sampling - Part 3: Guidance on sub-sampling in the field*

CSS99059 *Sludge, treated biowaste, and soils in the landscape – Sampling – Part 4: Guidance on procedures for sample packaging, storage, preservation, transport and delivery*

*CSS99060 Sludge, treated biowaste, and soils in the landscape – Sampling – Part 5: Guidance on the process of defining the sampling plan*

CSS99035 Soil, sludge and treated biowaste – Pre-treatment for organic characterisation

CSS99022 Soil, sludge and treated biowaste – Determination of dry matter – Gravimetric method

EN ISO 16720, *Soil quality — Pretreatment of samples by freeze drying for subsequent analysis*

ISO 14507, *Soil quality — Guidance for sample pre-treatment for the determination of organic contaminants in soil*

ISO/FDIS 22032, *Water quality — Determination of selected polybrominated diphenylethers in sediment and sewage sludge — Method using extraction and gas chromatography/mass spectrometry*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 12832 and the following apply.

#### 3.1

##### **analytical blank**

blank sample covering the complete analytical procedure including extraction, cleanup, identification and quantification including all the relevant reagents and materials

#### 3.2

##### **congener**

any of the 209 individual PBDEs

#### 3.3

##### **internal standard**

standard added before extraction and used for calculation of results

#### 3.4

##### **limit of detection**

##### **LOD**

expression of the mean sample blank value plus three times the standard deviation (3s) of the blank

[EUROCHEM Guide]

#### 3.5

##### **limit of quantification**

##### **LOQ**

expression of the mean sample blank value plus, either, five, six or ten times the standard deviation of the blank

[EUROCHEM Guide]

#### 3.6

##### **spiking**

addition of <sup>13</sup>C<sub>12</sub>-labelled PBDE standards or any internal standards

### 4 Abbreviations

See Table 2.

Table 2 — Abbreviations and names of substances

Abbreviation	Name
HBCD	Hexabromocyclododecane
MeTBBPA	Dimethyl tetrabromobisphenol A
PBB	Polybrominated biphenyl
PBDE	Polybrominated diphenylether
TBBPA	Tetrabromobisphenol A

## 5 Principle

This European Standard is based on the use of gas chromatography/mass spectrometry in the electron impact (EI) or negative ion chemical ionisation (NCI) mode, to enable the separation, detection and quantification of selected PBDEs in soil and sludge. When NCI mode is used, determination of the concentration in the sample was based on an internal standard calibration. However, when EI mode is applied, the isotope dilution technique is used.

Soil and sludge is sampled according to [CSS99031, 32, and 57 - 60: \(Horizontal standard module\(s\) for sampling of sludge, soil and waste\)](#). Internal standards are added prior to extraction by an organic solvent. Extraction procedures are usually based on soxhlet or equivalent extraction methods of dried preferable freeze dried samples. Sample cleanup is usually carried out by column liquid chromatographic techniques using different adsorbents. This step allows the removal of sample matrix components, which may overload the separation method and disturb the quantification. Furthermore, an enrichment of the analytes in the final sample extract is achieved.

The deca-BDE-209 congener has a number of additional analytical difficulties. This compound is not stable at high temperatures in the injector and on the GC column. Moreover, the compound is sensitive to degradation by UV light and strongly adsorbs to any kind of surfaces. Thus, special attention shall be paid on the sample preparation and instrumental determination for this compound.

## 6 Reagents

Only use reagents with negligibly low concentrations of DBPE compared with the concentration to be determined and verify by blank determinations. To prevent degradation, store standards in the dark at temperatures recommended by the manufacturer (calibration solutions preferably approximately at  $-18\text{ }^{\circ}\text{C}$ ).

### 6.1 Solvents for extraction, cleanup and preparation of stock solutions

A variety of solvents may be used depending on the particular sample matrix to be analysed and the availability of commercial standard solution. E. g. toluene ( $\text{C}_7\text{H}_8$ ), or acetone (propanone,  $\text{C}_3\text{H}_6\text{O}$ ), or a mixture of acetone (propanone,  $\text{C}_3\text{H}_6\text{O}$ ) and hexane ( $\text{C}_6\text{H}_{14}$ ), or heptane ( $\text{C}_7\text{H}_{16}$ ), or iso-octane (2,2,4-trimethylpentane  $\text{C}_8\text{H}_{18}$ ), or nonane ( $\text{C}_9\text{H}_{20}$ ), or dichloromethane ( $\text{CH}_2\text{Cl}_2$ ). Solvents used for extraction and cleanup have to be of pesticide grade or equivalent quality and checked for blanks. Adsorbents like alumina oxide, silica gel and others used for cleanup have to be of p.a. quality or better and pre-cleaned and activated if necessary.

### 6.2 Reference substances

See [Table 3](#). Solutions of reference substances are commercially available.

### 6.3 Internal standards

Solutions of reference substances for use as internal standards for electron impact ionisation ([Table 3](#), substances 1 to 8) and for negative ion chemical ionisation ([Table 3](#), substances 9, 10 and 11) are



commercially available. For electron impact ionisation, use at least one mass labelled PBDE congener for each degree of bromination.

**NOTE** Internal standards for GC-MS with negative ion chemical ionisation: Check for interferences when non-labelled PBDE is used as an internal standard. Other BDE congeners are suitable as internal standards, e. g. BDE -140. Internal standards for GC-MS with electron impact ionisation: other compounds, such as fluorinated polybrominated diphenyl ethers, are also commercially available and are also suitable as internal standards [1].

Table 3 — Internal standard reference solutions

No	Name	Formula	Abbreviation	Molar mass (g/mol)
	Internal standards for GC-MS with electron impact ionisation			
1	2,2',4,4' –Tetrabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>6</sub> Br <sub>4</sub> O	<sup>13</sup> C-BDE-47	497,7035
2	2,2',4,4',5 – Pentabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>5</sub> Br <sub>5</sub> O	<sup>13</sup> C-BDE-99	576,5995
3	2,2',4,4',6 – Pentabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>5</sub> Br <sub>5</sub> O	<sup>13</sup> C-BDE-100	576,5995
4	2,2',4,4',5,6' – Hexabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>4</sub> Br <sub>6</sub> O	<sup>13</sup> C-BDE-154	655,4955
5	2,2',4,4',5,5' – Hexabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>4</sub> Br <sub>6</sub> O	<sup>13</sup> C-BDE-153	655,4955
6	2,2',3,4,4',5',6 –Heptabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>3</sub> Br <sub>7</sub> O	<sup>13</sup> C-BDE-183	734,3916
7	2,2',3,3',4,4',6,6' –Octabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> H <sub>2</sub> Br <sub>8</sub> O	<sup>13</sup> C-BDE-197	813,2878
8	Decabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> Br <sub>10</sub> O	<sup>13</sup> C-BDE-209	971,0797
	Internal standards for GC-MS with negative ion chemical ionisation			
9	3,3',4,4' –Tetrabromodiphenylether	C <sub>12</sub> H <sub>6</sub> Br <sub>4</sub> O	BDE-77	485,7950
10	2,2',3,4,4',5,6 –Heptabromodiphenylether	C <sub>12</sub> H <sub>3</sub> Br <sub>7</sub> O	BDE-181	722,4832
11	Decabromo[ <sup>13</sup> C <sub>12</sub> ]diphenylether	<sup>13</sup> C <sub>12</sub> Br <sub>10</sub> O	<sup>13</sup> C-BDE-209	971,0797

#### 6.4 Calibration solutions for multicomponent-multilevel calibration

Prepare calibration solutions with concentrations according to the detection capacity of the mass spectrometer. Combine the multicomponent stock solutions of reference substances and internal standards to produce the solutions e. g. shown in Table 6 by appropriate dilution with the appropriate solvent e. g. toluene, or nonane, or iso-octane.

In order to avoid potential photodegradation, store the solutions in the dark. Check the concentrations of calibration solutions before use.

Use one of the calibration solutions to optimise the GC-MS system and to determine the retention times.

## 7 Apparatus

### 7.1 General

The apparatus and materials listed below are meant as minimum requirements for “conventional” sample treatment with soxhlet extraction and column chromatographic cleanup. Additional apparatus and materials may be necessary due to different methods of sample extraction and cleanup methods.

In order to avoid photodegradation under influence of direct sunlight, use amber glassware (or cover normal glassware with e. g. aluminium foil).

Clean all glassware by heating at 420 °C for several hours and rinsing with toluene prior use. Volumetric apparatus will require recalibration prior to use if heated.

### 7.2 Equipment for sample preparation

**7.2.1** Laboratory fume hood, of sufficient size to contain the sample preparation equipment listed below.

**7.2.2** Freeze drying apparatus.

**7.2.3** Deep freezer.

**7.2.4** Mortar and pestle, or a grinding mill.

**7.2.5** Drying oven, capable of maintaining temperatures in the ranges of 100 °C to 450 °C for baking and storage of cleanup materials, for baking of glassware and for dry residue determination of samples.

**7.2.6** Sieve shaker with appropriate sieve meshes (aperture size), e. g. 2 mm.

**7.2.7** Desiccator.

**7.2.8** Balances, consisting of an analytical type capable of weighing 0,1 mg and a top-loading type capable of weighing 10 mg.

### **7.3 Extraction apparatus**

Soxhlet extractor consisting of: round bottom flasks e. g. 250 ml, Soxhlet extractors and Soxhlet thimbles e. g. 27 mm x 100 mm, vertical condensers e. g. 300 mm, heating apparatus.

### **7.4 Cleanup apparatus**

**7.4.1** Disposable pipettes, either disposable Pasteur pipettes, or disposable serological pipettes.

**7.4.2** Glass columns for chromatographic cleanup.

### **7.5 Concentration apparatus**

**7.5.1** Rotary evaporator, equipped with a variable temperature water bath and:

- a) vacuum source for rotary evaporator equipped with shutoff valve at the evaporator and vacuum gauge;
- b) recirculating water pump and chiller (use of tap water for cooling the evaporator wastes large volumes of water and can lead to inconsistent performance as water temperatures and pressures vary);
- c) round-bottom flask, 100 ml and 500 ml or larger, with ground-glass fitting compatible with the rotary evaporator.

NOTE Other evaporation devices such as turboevaporator can also be used.

**7.5.2** Nitrogen blowdown apparatus, equipped with bath controlled in the range of 30 °C to 60 °C, installed in a fume hood.

**7.5.3** Amber glass with fluoropolymer-lined screw-cap.

### **7.6 Other equipment**

**7.6.1** Gas chromatograph, with either a splitless injection port or an on-column injection port coupled to a mass spectrometer (GC-MS) with electron impact or chemical ionisation and appropriate reactant gas (e. g. CH<sub>4</sub>).

**7.6.2** Fused silica column with non-polar low bleed separating phase; e. g. inner diameter < 0,25 mm, length 15 m, film thickness of 0,1 µm.

**7.6.3** Data system, capable of collecting, recording, and storing MS data.

## 8 Sampling and sample pre-treatment

### 8.1 Sampling

Sampling should be carried out in accordance with [CSS99031, 32, and 57 - 60:: \(Horizontal standard module\(s\) for sampling of sludge, soil and waste\)](#).

In addition to this standard the following requirements apply. Samples should be stored in suitable containers with an appropriate closure material such as PTFE. Samples to be frozen may be stored in aluminium containers pre-cleaned by heating to 450 °C for minimum 4 h or by rinsing with a non-chlorinated solvent.

Store and transport in the dark at approximately 4 °C. The sample pre-treatment should take place within 24 h of sampling. Alternatively, samples may be frozen (-18 °C) directly after sampling and kept frozen for a maximum of one month before sample pre-treatment.

### 8.2 Sample pre-treatment

Drying and homogenization should be carried out according to [EN www: \(Horizontal standard module\(s\) for pre-treatment of solid materials\)](#).

Store the ground material in a desiccator or a tightly closed glass container.

## 9 Extraction and cleanup

### 9.1 General

There are a variety of possible techniques for extraction and cleanup. Different combinations of those techniques result in a number of procedures, which can be applied to the analysis of PBDE. Usually, many other compounds interfering with the determination of PBDE are co-extracted with the analytes. Thus, extensive cleanup procedures have to be applied prior the extract can be subjected to GC-MS analysis.

### 9.2 Extraction

Sample amount used for extraction may vary (up to 10 g) depending on the expected level of contamination.

Internal standards listed in [Table 3](#) shall be added before extraction.

The extraction procedure is carried out using Soxhlet extraction. Various solvents produce similar extraction efficiencies after a 16 h Soxhlet extraction. However, extraction of deca-BDE-209 requires specific attention and, sometimes, longer extraction times than other PBDE congeners. The use of toluene as an extraction solvent for extraction of BDE-209 is recommended.

Soxhlet extraction is described as reference procedure, but other techniques, e. g. accelerated solvent extraction or pressurized liquid extraction, offering shorter extraction times may also be used after testing their comparability to Soxhlet extraction.

After the extraction is complete, concentrate the extract nearly to dryness using a suitable evaporation device.

### 9.3 Cleanup

Depending on the different sample matrices encountered, a variety of sample extract cleanup procedures may be suitable. Examples of cleanup procedures are given in [Annex A](#).

In general, methods are based on cleanup by adsorption column chromatography. Depending on the matrix in which the PBDE are analysed additional cleanup steps to remove matrix constituents such as lipids, sulphur etc. including gel permeation chromatography (GPC), sulfuric acid and copper treatment may be necessary.

## 9.4 Final concentration of cleaned sample extract

To achieve sufficient detection limits, the cleaned sample extract shall be concentrated to a volume in the order of 25 µl to 500 µl before quantification.

Depending on the method to be used for solvent volume reduction the following precautions have to be taken into consideration:

- a) Rotary evaporators: Losses might be substantial when reducing solvent volumes below 10 ml.
- b) Counter gas flow evaporators: Volumes should not be reduced to less than 1 ml.
- c) Nitrogen flow: An excessive flow of nitrogen which disturbs the solvent surface should be avoided. The vial shape has also some influence on possible losses. V-shaped vials or vial inserts shall be used for volume reductions below around 200 µl.

NOTE It should be avoided that the extracts would be evaporated until dryness, because deca-BDE-209 may not completely re-dissolve after that step. Thus, during concentration, use toluene as a keeper.

## 9.5 Blank determination

Analyse as a blank, a clean Soxhlet thimble in exactly the same way as the sample, but replacing the sample by the appropriate amount of baked sand. The concentration of PBDE in the blank should be negligible, compared with the concentrations of PBDE to be determined.

# 10 GC-MS analysis

## 10.1 General

The configuration of the GC system and its operational conditions may have a significant influence on the determination of PBDE, in particular, on the response and peak shape of deca-BDE-209. The injection technique, type of retention gap, press-fit connector, column brand, stationary phase and column length significantly affect the yield of PBDE from the chromatographic system, as well as the precision of the determination [2]. Especially for deca-BDE-209 the response can decrease to zero by selecting non-optimal GC-MS conditions.

## 10.2 Gas chromatographic analysis

Gas chromatographic separation has to be carried out in such a way, that sufficient separation of all PBDE congeners is achieved.

Different gas chromatographic stationary phases could be applied for BDE determinations (Table 4), but especial attention must be paid on the potential co-elutions with other PBDE congeners, as well as with other brominated flame retardants, such as hexabromocyclododecane (HBCD), dimethyl tetrabromobisphenol A (MeTBBPA) and polybrominated biphenyls (PBB), which are also present in many environmental samples [3].

Especially for the analysis of deca-BDE-209, minimise the exposure of the samples to high temperatures for long periods of times during the injection and separation stages, because of the thermal degradation of BDE-209 at temperatures higher than 300 °C. Optimise the chromatographic separation step, paying special attention to the peak height of BDE-209. It is recommended to use pressure pulse injection or a short splitless time. On-column injection may be also a suitable alternative, however this injection technique is sensitive to contamination.

**Table 4 — Co-elution of selected BDE congeners on seven different GC columns<sup>1)</sup>**

Compound	DB-1 (30 m x 0,25 mm x 0,25 µm)	DB-5 (30 m x 0,25 mm x 0,25 µm)	HT-5 (30 m x 0,25mm x 0,10 µm)	DB-17 (30 m x 0,25 mm x 0,25 µm)	DB-XLB (30 m x 0,25 mm x 0,25 µm)	HT-8 (25 m x 0,22 mm x 0,25 µm)	CP-Sil 19 (17 m x 0,15 mm x 0,30 µm)
BDE-47	—	—	—	—	—	—	—
BDE-99	—	—	BDE-116	BDE-127	—	—	—
BDE-100	—	—	BDE-109	BDE-101	—	BDE-109, BDE-120	—
BDE-153	—	—	HBCD	BDE-168	—	—	—
BDE-154	MeTBBPA, BB-153	MeTBBPA, BB-153	—	BDE-105	—	BDE-126	BB-153
BDE-183	BB-169	BB-169	—	—	—	—	—

The following conditions can be used as a starting point for optimizing a method:

a) From tetra- to hepta-BDE

Chromatographic column: HP-5MS (30 m × 0,25 mm i.d., 0,25 µm film thickness) containing 5 % phenyl methyl siloxane.

Oven temperature program: from 110 °C (hold for 1 min) to 180 °C (hold for 1 min) at 8 °C/min, then from 180 °C to 240 °C (hold for 5 min) at 2 °C/min, and then from 240 °C to 265 C (hold for 6 min) at 2 °C/min.

Injector: splitless injection mode during 1 min. Injector temperature = 275 °C.

Carrier gas: Helium at 6 psi.

MS-Interface temperature: 250 °C

b) From octa- to deca-BDE

Chromatographic column: DB-5MS (15 m × 0,25 mm i.d., 0,10 µm film thickness) containing 5 % phenyl methyl siloxane.

Oven temperature program: from 140 °C (hold for 2 min) to 325 °C (hold for 10 min) at 10 °C/min.

Injector: splitless injection mode during 1 min. Injector temperature = 275 °C.

Carrier gas: Helium at 6 psi.

MS-Interface temperature: 270 °C

1) DB-1 (100% methylpolysiloxane), DB-5 (5% phenyl-methylpolysiloxane), DB-17 (50% phenyl-methylpolysiloxane) and DB-XLB (Proprietary) from J&W Scientific, Folsom, CA, USA. HT-5 (5% phenyl-methylpolysiloxane (carborane)) and HT-8 (8% phenyl-methylpolysiloxane (carborane)) from SGE International, Ringwood, Australia. CP-Sil 19 (14% cyanopropyl-methylpolysiloxane) from Chrompack, Middelburg, The Netherlands, are examples of suitable products available commercially. This information is given for the convenience of users of this European standard and does not constitute an endorsement by CEN of these products. Equivalent products may be used if they can be shown to lead to the same results.

### 10.3 Mass spectrometric detection

The mass spectrometer is used in the MID-Mode (Multiple Ion Detection). The ion source temperature should be between 200 °C and 250 °C depending on type of instrument.

For identification and quantification the masses given in [tables 5 and 6](#) have to be recorded in MID mode.

**Table 5 — Ions for negative ion chemical ionisation detection**

Compound	Ions for quantification	Ions for qualification
BDE-47	79	81
BDE-99	79	81
BDE-100	79	81
BDE-154	79	81
BDE-153	79	81
BDE-183	79	81
BDE-196	79	81
BDE-197	486,7	484,7
BDE-203	79	81
BDE-209	486,7 <sup>a</sup>	484,7
Internal standards		
BDE-77	79	81
BDE-181	79	81
<sup>13</sup> C-BDE-209	494,7	496,7
<sup>a</sup> Do not use the ion 488,7 because of overlapping with a fragment ion from <sup>13</sup> C-BDE-209.		

Table 6 — Ions for electron impact ionisation detection

Compound	Ion	Monitored ions ( <i>m/z</i> )
BDE-47	[M+2] <sup>+</sup> ; [M+4] <sup>+</sup>	483,7; 485,7
BDE-99	[M+4] <sup>+</sup> ; [M+6] <sup>+</sup>	563,6; 565,6
BDE-100	[M+4] <sup>+</sup> ; [M+6] <sup>+</sup>	563,6; 565,6
BDE-153	[M-2Br+2] <sup>+</sup> ; [M-2Br+4] <sup>+</sup>	481,7; 483,7
BDE-154	[M-2Br+2] <sup>+</sup> ; [M-2Br+4] <sup>+</sup>	481,7; 483,7
BDE-183	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	561,6; 563,6
BDE-196	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	639,5; 641,5
BDE-197	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	639,5; 641,5
BDE-203	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	639,5; 641,5
BDE-209	[M-2Br+6] <sup>+</sup> ; [M-2Br+8] <sup>+</sup>	797,4; 799,4
Internal standards		
<sup>13</sup> C-BDE-47	[M+2] <sup>+</sup> ; [M+4] <sup>+</sup>	495,7; 497,7
<sup>13</sup> C-BDE-99	[M+4] <sup>+</sup> ; [M+6] <sup>+</sup>	575,6; 577,6
<sup>13</sup> C-BDE-100	[M+4] <sup>+</sup> ; [M+6] <sup>+</sup>	575,6; 577,6
<sup>13</sup> C-BDE-153	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	495,7; 497,7
<sup>13</sup> C-BDE-154	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	495,7; 497,7
<sup>13</sup> C-BDE-183	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	573,6; 575,6
<sup>13</sup> C-BDE-197	[M-2Br+4] <sup>+</sup> ; [M-2Br+6] <sup>+</sup>	651,5; 653,5
<sup>13</sup> C-BDE-209	[M-2Br+6] <sup>+</sup> ; [M-2Br+8] <sup>+</sup>	809,4; 811,4

Check that the ions used are free from interferences caused by matrix components.

#### 10.4 Minimum requirements for identification of PBDE

Consider an analyte to be identified, if

- the retention time of the analyte in the mass chromatogram of the sample is the same as the retention time of the reference substance in the mass chromatogram of the calibration standard solution measured under identical experimental conditions (the deviation shall be below 1 %, and not exceeding 12 s);
- the ratio of the two monitored mass is within ± 10 % of the theoretical bromine isotope ratio;
- the signal-to-noise ratio of the raw data shall be at least 3:1 for the signal used for identification. The base line noise shall be measured in front of the signal of the native congener within a signal-free window corresponding to 10 times the signal width at half height.

### 11 Calibration of the GC-MS

#### 11.1 General

Modern mass spectrometric detection provides linear correlations between the concentrations of single substances and the corresponding responses over several decades of concentration. This facilitates an effective means of calibration.



## 11.2 Evaluation of the range of the linear relationship

The calibration must be carried out with at least five calibration solutions. These solutions contain all native PBDE congeners of interest in different precisely defined amounts and all internal standards in the same concentrations as expected in the spiked sample solutions.

See [Table 7](#) as an example of concentrations for evaluating a linear range over several decades of concentration. The linear relationship should be assured with the concentration and response relationships.

Plot, for example, the ratio values  $\frac{y_i}{y_{is,i}}$  (peak areas, peaks heights or integration units) for each substance  $i$

on the ordinate and the associated ratio of mass concentrations  $\frac{\rho_i}{\rho_{is,i}}$  on the abscissa.

Establish the linear function of values  $\frac{y_i}{y_{is,i}}$  and  $\frac{\rho_i}{\rho_{is,i}}$  of the measured series using the following Equation (1):

$$\frac{y_i}{y_{is,i}} = a_i \frac{\rho_i}{\rho_{is,i}} + b_i \quad (1)$$

where

$y_i$  is the measured response of substance  $i$ ; the unit depends on the evaluation; e. g. area value;

$\rho_i$  is the mass concentration of substance  $i$ , in the working standard solution, in nanograms per millilitre, ng/ml;

$a_i$  is the slope of the calibration function of substance  $i$ , the unit depends on the evaluation, e. g. area value x millilitres per nanograms, ml/ng;

$b_i$  is the ordinate intercept of the calibration curve. The unit depends on the evaluation, e. g. area value;

$y_{is,i}$  is the measured response of the internal standard for the substance  $i$ , the unit depends on the evaluation, for example, area value;

$\rho_{is,i}$  is the mass concentration of the internal standard, for the substance  $i$ , in nanograms per millilitre, ng/ml.

Calibration frequency depends on the stability of the instrument. Daily calibration checks shall be run. In addition a full calibration shall be repeated after major changes such as:

- use of new or repaired equipment;
- replacement of GC columns;
- after cleaning of the separation and detection systems;
- if the deviation of an injected calibration standard exceeds 20 %.

The obtained calibration curves are used to calculate the concentration of each congener of interest. The concentrations of all congeners of interest in the samples shall be within the linear range of the method.

### 11.3 Calibration with internal standards

The use of an internal standard for the determination of the concentration minimises both possible errors made during injection and by sample losses during sample pre-treatment steps, furthermore differences in the final sample extract volumes and changes in recoveries caused by matrix effects.

See [Table 7](#) for typical concentrations of reference compounds and internal standards in solutions for evaluating the linear range and for a listing of which internal standard to use for each PBDE compound. Adjust the concentrations according to the sensitivity of the equipment used and the range of determinations required.

**Table 7 — Example concentrations in solutions for evaluating the linear range**

Compound	Solution 1	Solution 2	Solution 3	Solution 4	Solution 5	Solution 6	Solution 7
	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml
BDE-47	5	12,5	25	50	100	150	250
BDE-99	5	12,5	25	50	100	150	250
BDE-100	5	12,5	25	50	100	150	250
BDE-154	5	12,5	25	50	100	150	250
BDE-153	5	12,5	25	50	100	150	250
BDE-183	5	12,5	25	50	100	150	250
BDE-196	25	50	100	200	500	700	1000
BDE-197	25	50	100	200	500	700	1000
BDE-203	25	50	100	200	500	700	1000
BDE-209	25	50	100	200	500	700	1000
Internal standards for NCI							
BDE-77 (Internal standard for BDE-47, BDE-99 and BDE-100)	100	100	100	100	100	100	100
BDE-181 (Internal standard for BDE-153, BDE-154 and BDE-183)	100	100	100	100	100	100	100
<sup>13</sup> C-BDE-209 (Internal standard for BDE-196, BDE-197, BDE-203 and BDE-209)	500	500	500	500	500	500	500

Table 7 (continued)

Compound	Solution 1	Solution 2	Solution 3	Solution 4	Solution 5	Solution 6	Solution 7
	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml	ng/ml
Internal standards for EI							
<sup>13</sup> C-BDE-47 (Internal standard for BDE-47)	200	200	200	200	200	200	200
<sup>13</sup> C-BDE-99 (Internal standard for BDE-99 and BDE-100)	200	200	200	200	200	200	200
<sup>13</sup> C-BDE-153 (Internal standard for BDE-154 and BDE-153)	200	200	200	200	200	200	200
<sup>13</sup> C-BDE-183 (Internal standard for BDE-183)	400	400	400	400	400	400	400
<sup>13</sup> C-BDE-197 (Internal standard for BDE-196, BDE-197 and BDE-203)	500	500	500	500	500	500	500
<sup>13</sup> C-BDE-209 (Internal standard for BDE-209)	500	500	500	500	500	500	500

#### 11.4 Quantification with the internal standard

Add a known amount of the internal standard to the sample prior to extraction. The mass concentration  $\rho_{is,i}$  in the final volume of extract shall be the same for calibration and sample measurement. Use the same solvent composition for the working standard solutions and the extracts.

Pre-treat and analyse the samples as described in 9.1 to 9.3. Inject identical volumes of the sample extracts as injected as calibration solutions.

Calculate the mass concentration  $\rho_{i,sample}$  of the substance using Equation (2).

$$\rho_{i,sample} = \frac{y_{i,sample} - b_i}{a_i} \cdot \frac{m_{is,i}}{m_{sample}} = \frac{\rho_{i,sample\ extract}}{\rho_{is,i,sample\ extract}} \cdot \frac{m_{is,i}}{m_{sample}} \quad (2)$$

where

$y_{i,sample}$  is the measured response, e. g. peak area, of the substance  $i$  in the sample extract;

$y_{is,i,sample}$  is the measured response, e. g. peak area, of the internal standard, for substance  $i$ , of the sample;

$\rho_{i,sample\ extract}$  is the mass concentration of the substance  $i$  in the sample extract, in nanograms per millilitre, ng/ml;

$\rho_{is,i, \text{sample extract}}$  is the mass concentration of the internal standard in the sample extract, for substance  $i$ , in nanograms per millilitre, ng/ml;

$\rho_{i, \text{sample}}$  is the mass concentration of the substance  $i$  in the solid sample in micrograms per kilogram,  $\mu\text{g}/\text{kg}$ .

$m_{is,i \text{ sample}}$  is the mass of the added internal standard substance, in micrograms,  $\mu\text{g}$ ;

$m_{\text{sample}}$  the sample mass in kilogram, in kg;

$a_i$  see Equation (1);

$b_i$  see Equation (1).

### 11.5 Results and reporting

Report results to two significant figures for the PBDE congeners.

### 12 Precision data

The performance characteristics of the method (Annex B) data have been evaluated. Table 8 gives the resulting typical values for repeatability and reproducibility limits as their observed ranges. The typical value is derived from the data in Table B.2 in Annex B by taking the median value and rounding the numbers.

**Table 8 — Typical values and observed ranges of the repeatability and reproducibility limits**

<p>The reproducibility limit provides a determination of the differences (positive and negative) that can be found (with a 95 % statistical confidence) between a single test result obtained by a laboratory using its own facilities and another test result obtained by another laboratory using its own facilities, both test results being obtained under the following conditions : The tests are performed in accordance with all the requirements of the present standard and the two laboratory samples are obtained from the same primary field sample and prepared under identical procedures. Conversely, the repeatability limit refers to measurements obtained from the same laboratory, all other conditions being identical. The reproducibility limit and the repeatability limit do not cover sampling but cover all activities carried out on the laboratory sample including its preparation from the primary field sample.</p>		
Results of the validation of the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste	Typical value %	Observed range %
Repeatability limit, r	28	14 - 84
Reproducibility limit, R	98	48 - 140

NOTE 1. The above results refer to the difference that may be found between two test results performed on two laboratory samples obtained under the same conditions. In the case when reference is made to the dispersion of the values that could reasonably be attributed to the parameter being measured, the above typical reproducibility

values and observed reproducibility ranges should be divided by  $\sqrt{2}$  to obtain the corresponding typical dispersion limit and its observed range. In the example of PBD 100 in Compost 1 the result and its dispersion limit is  $0.00085 \pm 0.0005$  ( $2 * sR = 57.6 \%$  of 0.00085). This means that with a 95 % statistical confidence, the values reasonably attributable to the measured parameter are larger than 0.00036 mg/kg and lower than 0.00134 mg/kg.

NOTE 2. The repeatability limit (r) and the reproducibility limit (R) as given in Table B.2 (Annex B) and in this table are indicative values of the attainable precision if the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) is performed in accordance with this standard [CSS99044].

NOTE 3. A limited number of materials and parameters were tested. Consequently, for other materials and parameters, performance characteristics may fall outside the limits as derived from the validation of the the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste.

NOTE 4. In particular for relatively heterogeneous materials, the repeatability and the reproducibility limits may be larger than the values given in Table B.2 (Annex B) and this table.

### 13 Test report

The test report shall contain the following information:

- a) Reference to this European Standard;
- b) sampling report including precise identification of the sample;
- c) sample storage and pre-treatment report;
- d) short description of the method used for extraction and sample cleanup;
- e) analytical results containing the levels of the individual PBDE congeners;
- f) Any details not specified in this document or which are optional and any other factor which may have affected the results.

## **Annex A** (informative)

### **Examples of operation of extraction and cleanup methods**

#### **A.1 Example 1**

##### **A.1.1 General**

This method is applicable for the determination of selected PBDE congeners in dry soil samples.

Sample volumes used for analysis have to be adapted in such a way that the expected amount of analyte lies between detection limit and upper end of calibration range. Samples exceeding the upper limit of the calibration range have to be repeated with smaller amounts of sample.

##### **A.1.2 Reagents**

**A.1.2.1** Alumina (neutral)

**A.1.2.2** Copper

**A.1.2.3** Dichloromethane

**A.1.2.4** Hexane

**A.1.2.5** Hydromatrix

##### **A.1.3 Procedure**

###### **A.1.3.1 Spiking the sample**

Weigh an exact amount of 1 g of the freeze-dried and grounded soil sample. Spike with internal standards. Spiked samples are kept over night to equilibrate.

###### **A.1.3.2 Simultaneous extraction and cleanup**

Pressurized liquid extraction system is used. Neutral alumina is selected as sorbent in the extraction cell. A 22 ml extraction cell is loaded by inserting two cellulose filters into the cell outlet, followed by 6 g of neutral alumina previously activated (activation at 150 °C overnight). Spiked soil samples were ground with neutral alumina (2 g) and copper (2 g). The mixture is loaded into the extraction cell on top of neutral alumina. The dead volume is filled with Hydromatrix, and the cell is sealed with the top cell cap. The extraction cell is filled with hexane:dichloromethane (1 : 1) mixture until the pressure reach 103,45 bar, and heated to 100 °C. After an oven heat-up time of 5 min. under these conditions, two static extractions of 10 min. at constant pressure and temperature are developed. After this static period, fresh solvent is introduced to flush the lines and cell, and the extract is collected in the vial. The flush volume amounted to 100 % of the extraction cell. The extraction is cycled twice. The volume of the resulting extract is about 35 ml.

###### **A.1.3.3 Preparation of sample solution for measurement**

The concentrated extract is quantitatively transferred to a vial by applying a gentle N<sub>2</sub>-stream. Adjust the endvolume to 50 µl to 250 µl. The vial should be labelled with sample identification and type of analyte. The sample can be stored in the dark at room temperature until measurement. For longer period of time the sample has to be stored in a refrigerator at app 4 °C.

## A.2 Example 2

### A.2.1 General

This method is applicable for the determination of selected PBDE congeners in dry soil samples.

Sample volumes used for analysis have to be adapted in such a way that the expected amount of analyte lies between detection limit and upper end of calibration range. Samples exceeding the upper limit of the calibration range have to be repeated with smaller amounts of sample.

### A.2.2 Reagents

A.2.2.1 Alumina (neutral)

A.2.2.2 Copper

A.2.2.3 Dichloromethane

A.2.2.4 Hexane

### A.2.3 Procedure

#### A.2.3.1 Spiking the sample

Weigh an exact amount of 1 g of the freeze-dried and grounded soil sample. Spike with internal standards. Spiked samples are kept over night to equilibrate.

#### A.2.3.2 Extraction

Soxhlet extraction is accomplished in cellulose thimbles containing 1 g of soil. 2 g of copper are added to soil to remove sulfur interference. Extraction is done using 100 ml of a mixture of hexane:dichloromethane (1 : 1) for 24 h. After extraction, the extracts and the rinses of the Soxhlet are combined, concentrated to a few ml by rotary evaporation and then subjected to the cleanup procedure.

#### A.2.3.3 Cleanup

Five grams alumina SPE cartridges are used. SPE cartridges are conditioned with 20 ml hexane. The sample volume loaded is ~ 1 ml, and the elution step is performed with 30 ml hexane:dichloromethane (1 : 2).

#### A.2.3.4 Preparation of sample solution for measurement

The concentrated extract is quantitatively transferred to a vial by applying a gentle N<sub>2</sub>-stream. Adjust the endvolume to 50 µl to 250 µl. The vial should be labelled with sample identification and type of analyte. The sample can be stored in the dark at room temperature until measurement. For longer period of time the sample has to be stored in a refrigerator at approximately 4 °C.

## A.3 Example 3

### A.3.1 General

This method is applicable for the determination of selected PBDE congeners in dry sludge samples.

Sample volumes used for analysis have to be adapted in such a way that the expected amount of analyte lies between detection limit and upper end of calibration range. Samples exceeding the upper limit of the calibration range have to be repeated with smaller amounts of sample.

### A.3.2 Reagents

- A.3.2.1 Alumina (neutral)
- A.3.2.2 Concentrated sulphuric acid
- A.3.2.3 Copper
- A.3.2.4 Dichloromethane
- A.3.2.5 Hexane
- A.3.2.6 Silica

### A.3.3 Procedure

#### A.3.3.1 Spiking the sample

Weigh an exact amount of 1 g of the freeze-dried and grounded sludge sample. Spike with internal standards. Spiked samples are kept over night to equilibrate.

#### A.3.3.2 Extraction

Soxhlet extraction is accomplished in cellulose thimbles containing 1 g of soil. 2 g of copper were added to soil to remove sulfur interference. Extraction is done using 100 ml of a mixture of hexane : dichloromethane (1 : 1) for 24 h. After extraction, the extracts and the rinses of the Soxhlet are combined, concentrated to a few ml by rotary evaporation and then subjected to the cleanup procedure.

#### A.3.3.3 Cleanup

The volumes Soxhlet extracts are reduced to 10 ml and treated with concentrated sulfuric acid (2 × 10 ml) in centrifugation tubes. The organic layers are combined and further cleaned up on a column containing activated silica impregnated with concentrated sulfuric acid (1 g, 2 : 1, w/w) by elution with 15 ml of dichloromethane : hexane (1 : 1). Subsequently the extracts are purified on five grams of alumina SPE cartridges. SPE cartridges are conditioned with 20 ml hexane. The sample volume loaded is ~ 1 ml, and the elution step is performed with 30 ml hexane : dichloromethane (1 : 2).

#### A.3.3.4 Preparation of sample solution for measurement

The concentrated extract is quantitatively transferred to a vial by applying a gentle N<sub>2</sub>-stream. Adjust the endvolume to 50 µl to 250 µl. The vial should be labelled with sample identification and type of analyte. The sample can be stored in the dark at room temperature until measurement. For longer period of time the sample has to be stored in a refrigerator at approximately 4 °C.



## **Annex B** (informative)

### **Repeatability and reproducibility data**

#### **B.1 Performance characteristics**

##### **B.1.1 Objective of the interlaboratory comparison**

In a European wide interlaboratory comparison study according to ISO 5725-2, the performance characteristics of the standard “Determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste” were established.

##### **B.1.2 Materials used in the interlaboratory comparison study**

The interlaboratory comparison of determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste was carried out with 5 - 6 European laboratories on 3 materials. The materials selected for the interlaboratory comparison were chosen to represent soil, sludge and biowaste as broad as possible, because the standard will find general application across different types of soil and soil related materials. (detailed information can be found in the final report on the Interlaboratory comparison study mentioned in the Bibliography).

In the interlaboratory comparison study the following starting points were used:

The laboratory samples were all taken from one large batch of the different materials according to the normal practice. The normal size reduction and the normal repeated mixing were carried out as needed to obtain representative laboratory samples from the large batch sample (ref JRC).

Note : the samples provided for the validation should not be confused with reference samples provided for certification purposes, as the performance results obtained have to be directly applicable to daily practice (less rigorous sample preparation than for a reference material).

The experimental plan was designed by project HORIZONTAL on the basis of each laboratory being given two laboratory samples of each material to be tested. This is in accordance with ISO 5725-2.

The materials examined cover all the grain size classes to which the the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste applies: very fine grained materials (like sludge: 0 µm to about 125 µm) and fine-grained materials (soil and compost: 0 mm to 4 mm).

Table B.1 provides a list of the types of materials chosen for testing and the selected components.

**Table B.B.1 — Material types tested and components analysed in the interlaboratory comparison of the method for the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste.**

Grain size class	Sample code	Material type tested	Parameters/congeners
Sludge (<0.5 mm)	Sludge 1	Sewage sludge 1 Mix 1 of municipal WWTP sludges from North Rhine Westphalia, Germany	PBD 47, PBD 99, PBD 100, PBD 153, PBD 154, PBD 183, PBD 196, PBD 197, PBD 203, PBD 209
Fine grained (< 2 mm)	Compost 1	Compost 1 Fresh compost from Vienna, Austria	PBD 47, PBD 99, PBD 100, PBD 153, PBD 154, PBD 183, PBD 196, PBD 197, PBD 203, PBD 209
	Soil 3	Soil 3 A sludge amended soil from Barcelona, Spain	PBD 47, PBD 99, PBD 100, PBD 153, PBD 154, PBD 183, PBD 196, PBD 197, PBD 203, PBD 209

### B.1.3 Interlaboratory comparison results

The statistical evaluation was conducted according to ISO 5725-2. The average values, the repeatability standard deviation ( $s_r$ ) and the reproducibility standard deviation ( $s_R$ ) were obtained (Table E.2).

The repeatability is determined as an interval around a measurement result (i.e. "repeatability limit"). This interval corresponds to the maximum difference that can be expected (with a 95% statistical confidence) between one test result and another, both test results being obtained under the following conditions: The tests are performed in accordance with all the requirements of the present standard by the same laboratory using its own facilities and testing laboratory samples obtained from the same primary field sample and prepared under identical procedures.

The repeatability limit was calculated using the relationship :  $r_{\text{test}} = f \cdot \sqrt{2} \cdot s_{r,\text{test}}$  with the critical range factor  $f = 2$ .

For instance, the repeatability limit around a measurement result of 0.005 mg PBD 100 /kg is  $\pm 0.002$  mg PBD 100/kg (i.e  $\pm 43$  % of 0.005).

NOTE The above relationship refers to the difference that may be found between two measurement results performed each on two laboratory samples obtained under the same conditions. The value  $f = 2$  used in the factor  $f \cdot \sqrt{2}$  corresponds to the theoretical factor of 1,96 for a pure normal distribution at 95 % statistical confidence. Also, this value  $f = 2$  corresponds to the usual value  $k = 2$  of the coverage factor recommended in the Guide to the expression of Uncertainty in Measurement (GUM). However it may be necessary to use a larger value for  $f$  in situation as described in clause 12.

The reproducibility, like repeatability is also determined as an interval around a measurement result (i.e. "reproducibility limit"). This interval corresponds to the maximum difference that can be expected (with a 95% statistical confidence) between one test result and another test result obtained by another laboratory, both test results being obtained under the following conditions : The tests are performed in accordance with all the requirements of the present standard by two different laboratories using their own facilities and testing laboratory samples obtained from the same primary field sample and prepared under identical procedures.

The reproducibility limit was calculated using the relationship:  $R = f \cdot \sqrt{2} \cdot s_R$  with the critical range factor  $f = 2$ .

For instance, the reproducibility limit around a measurement result 0.005 mg PBD 100 /kg is  $\pm 0.003$  mg PBD 100/kg (i.e  $\pm 65$  % of 0.005).

NOTE The above relationship refers to the difference that may be found between two measurement results performed each on two laboratory samples obtained under the same conditions. The value  $f = 2$  used in the factor  $f \cdot \sqrt{2}$  corresponds to the theoretical factor of 1,96 for a pure normal distribution at 95 % statistical confidence. Also, this value  $f = 2$  corresponds to the usual value  $k = 2$  of the coverage factor recommended in the Guide to the expression of Uncertainty in Measurement (GUM). In the case when reference is made to the dispersion of the values that could reasonably be attributed to the parameter being measured, the dispersion limit is equal to  $k \cdot s_R$  with the usual value  $k = 2$ , resulting in a dispersion limit lower than the reproducibility limit (i.e. a ratio of  $\sqrt{2}$ ). However it may be necessary to use a larger value  $f \cdot \sqrt{2}$  (or  $k$ ) in situation as described in clause 12 .

**prEN XXXXX:2007 (E)**

In case of relatively heterogeneous materials, the repeatability and the reproducibility limits may be larger than the values given in Tables B.2 (this means that the value chosen for the critical range factor *f* is larger than 2 as well as for the coverage factor *k* for dispersion). This is because the extreme results may have been obtained in accordance with the present standard and/or be caused by the variability within, or in between, the laboratory samples.

Table B.B.2 — Results of the interlaboratory comparison studies of the determination of selected polybrominated diphenyl ethers by gaschromatography with mass spectrometric detection (GC-MS) in soil, sludge and treated biowaste. All concentrations in mg/kg.

<b>Matrix</b>	<b>Parameter</b>	<b>Mean</b>	<b>sr</b>	<b>sR</b>	<b>r</b>	<b>R</b>	<b>p</b>	<b>Outliers</b>	<b>Used number of data</b>	<b>Number of data reported below detection</b>	<b>Total no of data</b>
Sludge 1	PBD 47	0.0181		46.1			4		15	5	20
Compost 1	PBD 47	0.0039		9.4			3		12	0	12
Soil 3	PBD 47	0.0010	50%	50%	0.0014	0.0014	4	0	13	10	23
Sludge 1	PBD 99	0.0239	6.4%	28%	0.0043	0.0186	5	1	19	0	23
Compost 1	PBD 99	0.0029	31%	35%	0.0025	0.0028	5	0	17	4	21
Soil 3	PBD 99	0.0013		49.9			4		16	8	24
Sludge 1	PBD 100	0.0049	5.1%	17%	0.0007	0.0024	5	1	18	2	24
Compost 1	PBD 100	0.0009	25%	29%	0.0006	0.0007	4	0	14	7	21
Soil 3	PBD 100	6.1103		211			3		10	15	25
Sludge 1	PBD 153	0.0038	33%	38%	0.0034	0.004	5	0	18	0	18
Compost 1	PBD 153	0.0019		116			3		11	3	14
Soil 3	PBD 153	0.0011		177			2		10	10	20
Sludge 1	PBD 154	0.0023		23.4			4		15	2	17
Compost 1	PBD 154	0.0008		111.8			3		9	5	14
Soil 3	PBD 154	0.0002		104.9			4		13	6	19
Sludge 1	PBD 183	0.0048		121.7			3		12	2	14
Compost 1	PBD 183	0.0009		104.8			2		8	5	13
Soil 3	PBD 183	0.0011		139.5			3		12	6	18
Sludge 1	PBD 196	0.0037		47.0			2		8	7	15
Compost 1	PBD 196	0.0004		95.0			2		6	4	10
Soil 3	PBD 196	0.0023		51.9			3		12	2	14
Sludge 1	PBD 197	0.0062		83.4			2		6	8	14
Compost 1	PBD 197	0.0009		100.1			2		7	7	14
Soil 3	PBD 197	0.0032		90.4			2		8	6	14
Sludge 1	PBD 203	0.0037		46.1			2		8	4	12

Compost 1	PBD 203	0.0004		97.8			2		5	3	8
Soil 3	PBD 203	0.0022		59.8			3		12	0	12
Sludge 1	PBD 209	0.2493	17.0%	39%	0.1186	0.2689	5	0	16	2	18
Compost 1	PBD 209	0.0273		104			3		10	5	15
Soil 3	PBD 209	0.2582	11.15%	51%	0.0806	0.3676	6	0	22	0	22

Matrix	Parameter	Mean	sr	sR	r	R	p	Outliers	Used number of data	Number of data reported below detection	Total no of data
Sludge 1	Sum PBD	0.256	15.5%	54.8%	0.111	0.392	6	1	22		
Compost 1	Sum PBD	0.009	33.1%	63.7%	0.008	0.016	5	1	18		
Soil 3	Sum PBD	0.227	11.6%	71.7%	0.074	0.455	7	1	26		

Abbreviations: sr Repeatability standard deviation; SR Reproducibility standard deviation; r Repeatability limit (comparing two measurements); R Reproducibility limit (comparing two measurements); p Number of labs.

Note 1. In judging the results it is important to consider the concentration levels, at which measurements have been carried out. The choice was made to avoid spiking of samples. This implies that particularly in soil and compost low concentrations have been observed for some congeners and results below detection for other congeners. If measurement results are well below a possible critical level (regulation), between lab variabilities of up to 70 % may prove fit for purpose.

Note 2. The experience of labs with some of the new emerging contaminants may be limited adding to the between lab variability.

## Bibliography

- [1] H. Liu, A. Skalvoll, G. S. Reijerink, G. Luthe, J. E. Johansen: Synthesis of fluorinated polybrominated diphenyl ethers (F-PBDEs) as internal standards for environmental analysis; *Chemosphere*, Vol. 64, 250-255, 2006.
- [2] J. Björklund, P. Tollbäck, C. Hiärne, E. Dyremark, C. Östman: Influence of the injection technique and the column system on gas chromatographic determination of polybrominated diphenyl ethers; *Journal of Chromatography A*, Vol. 1041, 201-210, 2004.
- [3] E. Eljarrat, A. de la Cal, D. Barceló: Potential chlorinated and brominated interferences on the polybrominated diphenyl ether determinations by gas chromatography-mass spectrometry; *Journal of Chromatography A*, Vol. 1008, 181-192, 2003.
- [4] P. Korytár, A. Covaci, J. de Boer, A. Gelbin, U. A. Th. Brinkman: Retention-time database of 126 polybrominated diphenyl ether congeners and two Bromkal technical mixtures on seven capillary gas chromatographic columns; *Journal of Chromatography A*, Vol. 1065, 239-249, 2005.